


KIT OF FOUR PIVOTING WHEELS, TWO HERE WITH BRAKES FOR WALL ENCLOSURES COMPACNET

Pressed sheet metal support, zinc-plated finish, double ball bearing swivel head, screw hole.
Center of the wheel in polypropylene. Thermoplastic rubber band, non-marking, through-hole hub

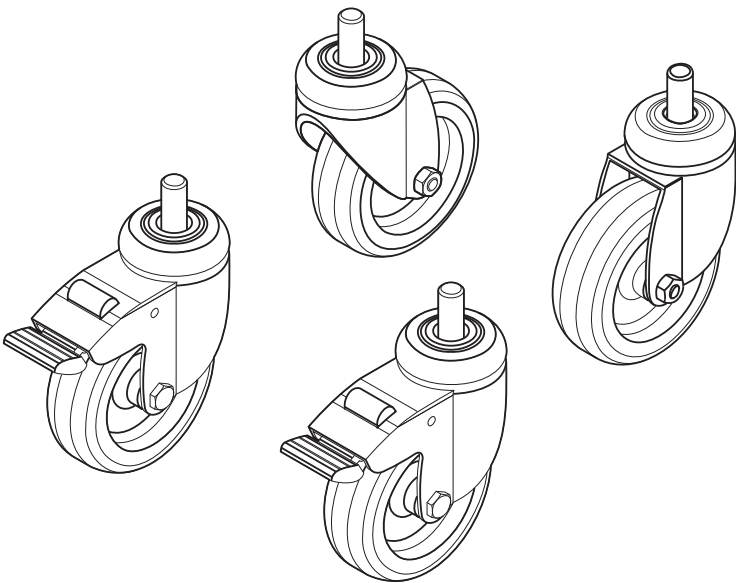


CHARACTERISTICS

COMPONENTS/PARAMETERS	VALUE
Wheel diameter	75 mm
Wheel width	25 mm
Overall width	43 mm
Useful height	100 mm
Threaded stud	30 mm x M10
Offset	24 mm
Pivoting encumbrance	160 mm
Useful height	100 mm
Useful temperature	- 20 / + 60 °C
Norm	EN 12530
Pirouette encumbrance radius	80 mm
Band hardness	Shore A 87
Load capacity	75 kg
Static load capacity	150 kg
Accessories	Washers and nuts
Weight	1.2 kg
Packaging	Carton box

KIT DI QUATTRO RUOTE GIREVOLI DI CUI DUE CON FRENO PER ARMADI A MURO COMPACNET

Supporto in lamiera stampata, finitura zincata, testa girevole su doppio giro sfere, foro vite.
Centro della ruota in polipropilene. Fascia in gomma termoplastica, antitraccia, mozzo a foro passante

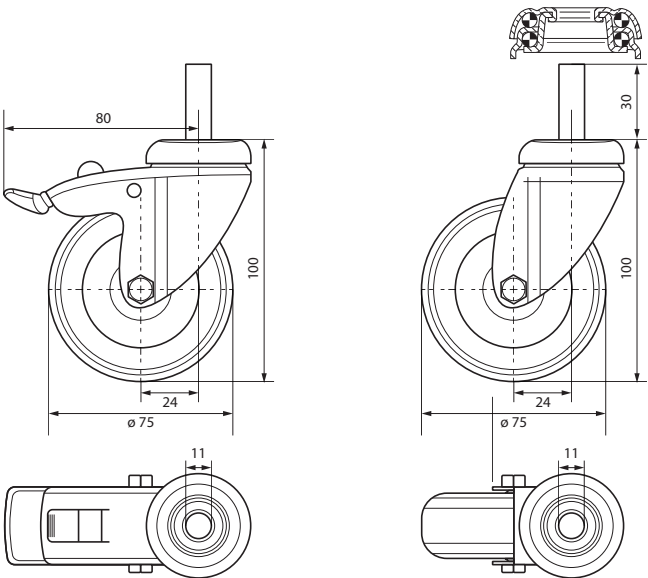

CARATTERISTICHE

COMPONENTE/PARAMETRO	VALORE
Diametro ruota	75 mm
Larghezza ruota	25 mm
Larghezza ingombro	43 mm
Altezza utile	100 mm
Perno filettato	30 mm x M10
Disassamento	24 mm
Ingombro piroettamento	160 mm
Altezza utile	100 mm
Temperatura di impiego	- 20 / + 60 °C
Norma	EN 12530
Raggio ingombro piroettamento	80 mm
Durezza della fascia	Shore A 87
Portata	75 kg
Portata statica	150 kg
Accessori	dadi e rondelle
Peso	1.2 kg
Imballo	Scatola di cartone