


# DATASHEET

## Duplex Patchcable LC-LC OS2 G652D 1m LSZH 2mm yellow

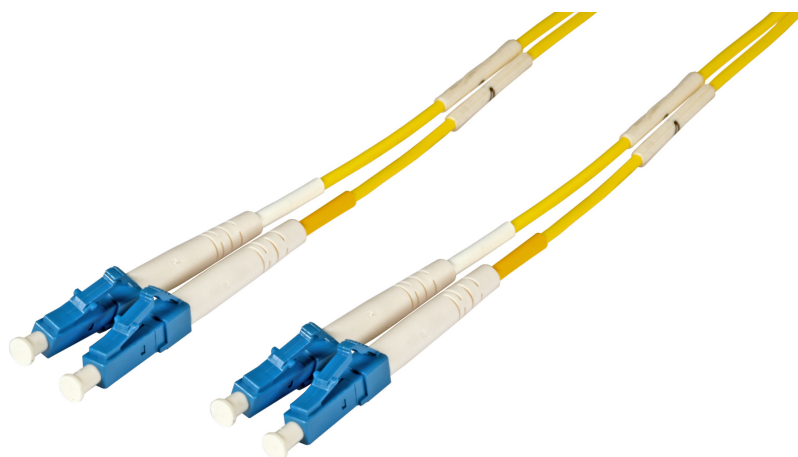

### General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years, also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

### Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034

EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade A/1 for multimode according to IEC 61753-122-2 (UPC cut)

100% tested and with individual measurement report

### Allgemeine Daten

Insertion loss 1310nm	< 0.3 dB
APC version	False
Number of fibres	2
Jacket Material	LSZH

### General data

Connector colour 2	blue
--------------------	------

This datasheet was created automatically on 16-04-2025 . Technical changes reserved.



# DATASHEET

## Duplex Patchcable LC-LC OS2 G652D 1m LSZH 2mm yellow

(Halogenfree)	acc. IEC60754-1
Connector colour 1	blue
Category	OS2 acc. to ITU-T G.652.D
Cable type	I-V(ZN) H
Anti-kink sleeve	put-on
Colour outer sheath	yellow
Cable Ø	2.0 mm
Bend optimized fiber	no

### Mechanical characteristics

Min. Bending radius (Dynamic)	20xOD
Max. Tension	160 N
Min. Bending radius (Static)	10xOD

### Cable construction

Cable Construction	Duplex
--------------------	--------

### Kabelaufbau

Type of connector connection 2	LC-Duplex
Fibre type	Single mode 9/125
Type of connector connection 1	LC-Duplex

### Cable sheath

Flame-retardant	According to EN 50265-2-1
Halogen free (according to EN 50267-2-3)	True
Low smoke	acc. IEC61034-1

### Umgebungsbedingungen

Storage Temperature	-20 - 85 °C
Operating Temperature	-20 - 75 °C

### Übertragungstechnische Eigenschaften

Quality class singlemode	B/2 acc. IEC 61753-1
--------------------------	----------------------

### Normen, Zulassungen, Zertifizierungen

This datasheet was created automatically on 16-04-2025 . Technical changes reserved.



# DATASHEET

## Duplex Patchcable LC-LC OS2 G652D 1m LSZH 2mm yellow

Cable Conform to Standard | IEC 60793-2


### Standards, approvals, certifications

Connector Conform to Standard | IEC 61754-20

### Available variants

ArtNr.	Bezeichnung	Length	Längentoleranz
O0350.0,5	Duplex Patchcable LC-LC OS2 G652D 0,5m LSZH 2mm yellow	0.5 m	±5 %
O0350.1	Duplex Patchcable LC-LC OS2 G652D 1m LSZH 2mm yellow	1.0 m	±5 %
O0350.1,5	Duplex Patchcable LC-LC OS2 G652D 1,5m LSZH 2mm yellow	1.5 m	±5 %
O0350.2	Duplex Patchcable LC-LC OS2 G652D 2m LSZH 2mm yellow	2.0 m	±5 %
O0350.3	Duplex Patchcable LC-LC OS2 G652D 3m LSZH 2mm yellow	3.0 m	±5 %
O0350.5	Duplex Patchcable LC-LC OS2 G652D 5m LSZH 2mm yellow	5.0 m	±5 %
O0350.7,5	Duplex Patchcable LC-LC OS2 G652D 7,5m LSZH 2mm yellow	7.5 m	±5 %
O0350.10	Duplex Patchcable LC-LC OS2 G652D 10m LSZH 2mm yellow	10.0 m	±5 %
O0350.15	Duplex Patchcable LC-LC OS2 G652D 15m LSZH 2mm yellow	15.0 m	±5 %
O0350.20	Duplex Patchcable LC-LC OS2 G652D 20m LSZH 2mm yellow	20.0 m	±5 %
O0350.25	Duplex Patchcable LC-LC OS2 G652D 25m LSZH 2mm yellow	25.0 m	±5 %
O0350.30	Duplex Patchcable LC-LC OS2 G652D 30m LSZH 2mm yellow	30.0 m	±5 %
O0350.35	Duplex Patchcable LC-LC OS2 G652D 35m LSZH 2mm yellow	35.0 m	±5 %
O0350.40	Duplex Patchcable LC-LC OS2 G652D 40m LSZH 2mm yellow	40.0 m	±5 %
O0350.50	Duplex Patchcable LC-LC OS2 G652D 50m LSZH 2mm yellow	50.0 m	±5 %

### Drawings

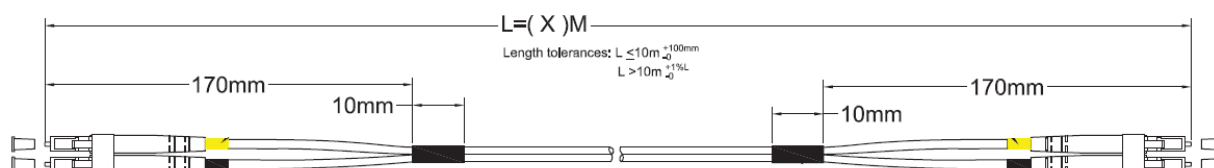

This datasheet was created automatically on 16-04-2025 . Technical changes reserved.